

## Data Acquisition Conditioner

### FEATURES

- Four input channels with RJ-45 connectors
- Hardware and software support for quarter-, half- and full-bridge circuits
- Built-in precision bridge completion for 120-, 350-, and 1000-ohm half and quarter bridges
- 8-Hz sampling rate
- Intuitive, user-friendly software communicates with up to six D4 units simultaneously
- Automatic and manual zero-balance and calibration
- Full control of all functions via USB Interface
- Portable, lightweight, and rugged design
- Powered via USB interface
- Programmable for custom applications

### DESCRIPTION

The Model D4 Data Acquisition Conditioner is a portable, USB-powered precision instrument for use with resistive strain gages and strain gage-based transducers.

The Model D4 has four channels of data acquisition. Connection to each channel is via a RJ-45 connector. Each channel of input accepts either full-, half-, and quarter-bridge configuration. All required bridge completion components for 120-, 350-, and 1000-ohm bridges are supplied.

Operation of the Model D4 is performed with commands sent via the USB connection. User-friendly application software is provided to control the D4 with a MS Windows-based personal computer. The software connects with up to six D4 units to create a system of up to 24 channels. The D4 units can be connected directly to a computer through its USB ports or through a USB hub.

A Programmer's Reference Kit that includes a Programmer's Reference Manual, a NI LabVIEW instrument driver, and programming examples to simplify writing custom applications is also included. The D4 is also supplied with a calibration software utility that allows calibration of the D4 via the USB interface. The application software, Programmer's Reference Kit, and Instruction Manual are on a single CD included with the D4 unit.

The Model D4 uses modern digital signal processing technology to provide excellent noise rejection and stability. Proprietary scaling and linearization algorithms provide unsurpassed measurement accuracy for strain gage bridge measurements.



### SPECIFICATIONS

*Note: Performance may be degraded at high levels of repetitive electrostatic discharge; however, no damage to the unit will occur.*

#### INPUT CONNECTIONS

**Type:** RJ-45 Modular  
**Quantity:** Four

#### BRIDGE CONFIGURATIONS

**Types:** Quarter-, half-, and full bridges  
**Bridge Impedance:** 60 to 2000  $\Omega$   
**Internal Bridge Completion:**  
Quarter bridge: 120  $\Omega$ , 350  $\Omega$  and 1000  $\Omega$   
 $\pm 0.01\%$   
Half bridge: 1000  $\Omega$   $\pm 0.01\%$

#### DATA CONVERSION


**A/D Converter:** Delta-sigma with integral chopper-stabilized programmable gain instrumentation amplifier

**Resolution:** 24 bits. Noise-free resolution: 18 bits typ.

**Filter:** Integrated linear phase FIR Sinc5 filter followed by a Sinc3 filter with a programmable decimation rate. Software selectable output rate provides >120 dB rejection of 50 or 60 Hz and higher level harmonics.



Front Panel

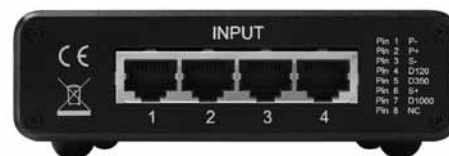

Back Panel

## Data Acquisition Conditioner

**MEASUREMENT RANGE/RESOLUTION**

**Strain Range:**  $\pm 31,000 \mu\epsilon$  at GF = 2.000.  
( $\pm 15.5$  mV/V)

**Resolution:**  $\pm 1 \mu\epsilon$  at GF = 2.000 ( $\pm 0.0005$  mV/V)

**MEASUREMENT ACCURACY**

$\pm 0.1\%$  of reading  $\pm 3$  counts. (Instrument Gage Factor = 2.000)

**GAGE FACTOR CONTROL**

**Range:** 0.500 to 9.900

**BALANCE CONTROL**

**Type:** Software

**Control:** Manual or automatic

**BRIDGE EXCITATION**

**Value:** 1.5 VDC nominal

**Control:** Software enable/disable

Measurements are fully ratiometric, and not degraded by variations in excitation voltage

**COMMUNICATION INTERFACE**

Universal serial bus (USB). Cable included

**SHUNT CALIBRATION**

**Location:** Across each quarter-bridge completion resistor

**Control:** Software

**Values:**

P- to D120:  $11.94K \Omega \pm 0.1\%$   
( $5000 \mu\epsilon$  at GF = 2.00)

P- to D350:  $34.8K \Omega \pm 0.1\%$   
( $5000 \mu\epsilon$  at GF = 2.00)

P- to D1000:  $99.5K \Omega \pm 0.1\%$   
( $5000 \mu\epsilon$  at GF = 2.00)

**POWER**

**USB:** 5 V 100 mA

**OPERATIONAL ENVIRONMENT**

**Temperature:**  $0^\circ$  to  $+50^\circ\text{C}$

**Humidity:** Up to 90% RH. Non-condensing.

**CASE**

**Material:** Aluminum

**SIZE AND WEIGHT**

**Size:** 4.3 W x 1.4 H x 5.7 L inches  
(110 x 36 x 145 mm)

**Weight:** 0.8 lb. (0.36 kg)

**ACCESSORIES**

D4-A106 Shielded Connectors

D4-A108 Crimping Tool

D4-A116 USB Cable (Type A to Type B—6-foot length)

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.